


Buffer Rings

D-10 Type

Material : TPU/8L95+PA
Hardness : 95 Shore A
Adaptable Temp °C : -20°C ~ 100°C

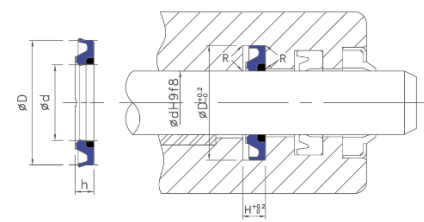

R ≤ 0.3
Rod Ø d Surface Roughness: 0.8~1.6 µ mRmax (0.2~0.4 µ mRa)

Type	Ø d	Ø D	h	H
D-10	22	32.7	4	4.3
	28	38.7	4	4.3
	40	55.5	6	6.3
	45	55.7	3.9	4.2
	45	60.5	6	6.3
	50	65.5	6	6.3
	55	70.5	6	6.3
	56	71.5	6	6.3
	60	75.5	6	6.3
	63	78.5	6	6.3
	65	80.5	6	6.3
	70	85.5	6	6.3
	75	90.5	6	6.3
	80	95.5	6	6.3
	85	100.5	6	6.3
	90	105.5	6	6.3
	95	110.5	6	6.3
	100	115.5	6	6.3
	105	120.5	6	6.3
	110	125.5	6	6.3
	115	130.5	6	6.3
	120	135.5	6	6.3
	124	139.5	6	6.3
	125	140.5	6	6.3
	130	145.5	6	6.3
	135	150.5	6	6.3
	140	155.5	6	6.3
	150	165.5	6	6.3

Type	Ø d	Ø D	h	H
D-10	155	170.5	6	6.3
	160	175.5	6	6.3
	170	185.5	6	6.3
	180	195.5	6	6.3

Buffer Rings

Type	Ø d	Ø D	h	H
D-10"	1 1/2	2 1/16	1/8	0.14
	1 1/4	1 13/16	1/8	0.14
	1 3/4	2 5/16	1/8	0.14
	2	2 9/16	1/8	0.14
	2 1/2	3 3/16	3/16	0.234
	2 1/4	2 15/16	3/16	0.234
	2 3/4	3 3/8	3/16	0.234
	3	3 5/8	3/16	0.234
	3 1/2	4 3/16	3/16	0.234
	4	4 5/8	3/16	0.234

Type	Ø d	Ø D	h	H
D-10"				