


緩衝密封件

D-10 Type

材質：TPU/8L95+PA  
硬度：95 Shore A  
工作溫度：-20°C ~ 100°C

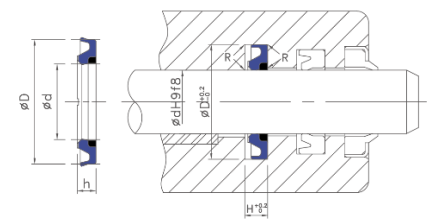

$R \leq 0.3$   
活塞桿表面應作 0.8~1.6  $\mu$  mRmax (0.2~0.4  $\mu$  mRa)的拋光。

| Type | Ø d | Ø D   | h   | H   |
|------|-----|-------|-----|-----|
| D-10 | 22  | 32.7  | 4   | 4.3 |
|      | 28  | 38.7  | 4   | 4.3 |
|      | 40  | 55.5  | 6   | 6.3 |
|      | 45  | 55.7  | 3.9 | 4.2 |
|      | 45  | 60.5  | 6   | 6.3 |
|      | 50  | 65.5  | 6   | 6.3 |
|      | 55  | 70.5  | 6   | 6.3 |
|      | 56  | 71.5  | 6   | 6.3 |
|      | 60  | 75.5  | 6   | 6.3 |
|      | 63  | 78.5  | 6   | 6.3 |
|      | 65  | 80.5  | 6   | 6.3 |
|      | 70  | 85.5  | 6   | 6.3 |
|      | 75  | 90.5  | 6   | 6.3 |
|      | 80  | 95.5  | 6   | 6.3 |
|      | 85  | 100.5 | 6   | 6.3 |
|      | 90  | 105.5 | 6   | 6.3 |
|      | 95  | 110.5 | 6   | 6.3 |
|      | 100 | 115.5 | 6   | 6.3 |
|      | 105 | 120.5 | 6   | 6.3 |
|      | 110 | 125.5 | 6   | 6.3 |
|      | 115 | 130.5 | 6   | 6.3 |
|      | 120 | 135.5 | 6   | 6.3 |
|      | 124 | 139.5 | 6   | 6.3 |
|      | 125 | 140.5 | 6   | 6.3 |
|      | 130 | 145.5 | 6   | 6.3 |
|      | 135 | 150.5 | 6   | 6.3 |
|      | 140 | 155.5 | 6   | 6.3 |
|      | 150 | 165.5 | 6   | 6.3 |

| Type | Ø d | Ø D   | h | H   |
|------|-----|-------|---|-----|
| D-10 | 155 | 170.5 | 6 | 6.3 |
|      | 160 | 175.5 | 6 | 6.3 |
|      | 170 | 185.5 | 6 | 6.3 |
|      | 180 | 195.5 | 6 | 6.3 |
|      |     |       |   |     |
|      |     |       |   |     |
|      |     |       |   |     |
|      |     |       |   |     |
|      |     |       |   |     |
|      |     |       |   |     |
|      |     |       |   |     |
|      |     |       |   |     |
|      |     |       |   |     |
|      |     |       |   |     |
|      |     |       |   |     |
|      |     |       |   |     |
|      |     |       |   |     |
|      |     |       |   |     |
|      |     |       |   |     |
|      |     |       |   |     |
|      |     |       |   |     |
|      |     |       |   |     |
|      |     |       |   |     |
|      |     |       |   |     |

## 緩衝密封件

[illegible][illegible]