


往復用防塵密封件

D-9 Type

材質：TPU / 8L95
硬度：95 Shore A
工作溫度：-20°C ~ 100°C

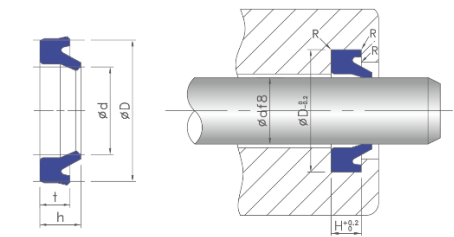

$R \leq 0.3$
活塞桿表面應作 0.8~1.6 μ mRmax (0.2~0.4 μ mRa) 的拋光。

Type	Ø d	Ø D	t	h	H
D-9	14	19	2	3.2	2.5
	30	38	5	6.5	6
	35	43	6	8	7
	35	45	6	8	7
	40	50	6	8	7
	45	55	6	8	7
	50	60	6	8	7
	50	63	7	9.5	8
	55	65	6	8	7
	55	68	7	9.5	8
	60	73	7	9.5	8
	65	78	7	9.5	8
	70	80	6	8	7
	70	83	7	9.5	8
	75	88	7	9.5	8
	80	93	7	9.5	8
	85	98	7	9.5	8
	90	103	7	9.5	8
	92	107.1	6.1	9	7
	95	108	7	9.5	8
	100	113	7	9.5	8
	105	118	7	9.5	8
	108	123	6.5	10.3	7.5
	110	123	7	9.5	8
	120	133	7	9.5	8
	125	138	7	9.5	8
	130	143	7	9.5	8
	136	149	7	9.5	8

Type	Ø d	Ø D	t	h	H
D-9	140	155	6.5	10.3	7.5
	155	170	6.5	10.3	7.5
	160	173	7	9.5	8
	170	183	7	9.5	8
	190	203	7	9.5	8