


往復用防塵密封件

DH-05 Type

材質：TPU / 8L953
硬度：93 Shore A
工作溫度：-20°C ~ 100°C

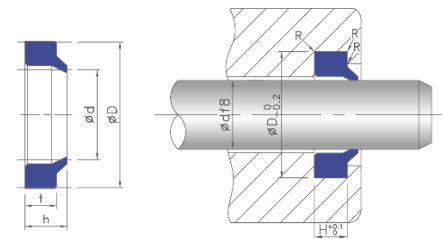

R ≤ 0.3
活塞桿表面應作 0.8~1.6 μmRmax (0.2~0.4 μmRa) 的拋光。

Type	Ø d	Ø D	t	h	H
DH-05	18	25	3.8	5.2	4
	18	26	4	7	4.3
	18	28	4	7	4.3
	18	28.5	6	8.4	6.3
	18	30	6	6.5	6.3
	19	26	2.5	4	2.8
	20	28	5	7	5.3
	25	33	3	5	3.3
	25	33	5	7	4.5
	28	36	5	7	5.3
	30	38	5	7	5.3
	30	38.6	4.5	6.5	4.8
	32	40	3.7	6.5	4.0
	33	40.6	1.6	3	2
	35	43	5	7	5.3
	35	43.6	4.5	6.5	4.8
	36	44	5	7	5.3
	37	45	5	6.5	5.3
	38	46	2.5	4	2.8
	40	48.6	4.5	6.5	4.8
	40	50	5	7	5.3
	42	50	5	7	5.3
	45	53	5	7	2.3
	50	58	5	6.5	5.3
	50	58	5	7	5.3
	50	60	5	7	5.3
	50	60.6	4.5	6.5	4.8
	50.8	63.5	4.5	7.7	4.8

Type	Ø d	Ø D	t	h	H
DH-05	50.8	63.5	6.35	9.52	6.5
	55	65	5	7	5.3
	60	68	5	7	5.3
	63	71	5	6.5	5.3
	75	85	5	7	5.3
	76.2	88.9	6.4	10	6.5
	78	86	5	7	5.3
	80	88.6	5	7	5.3
	86.5	101.5	6.5	10.3	6.5
	97	105	5	7	5.3
	100	110	5	7	5.3
	100	112	7	12	7.1
	105	118	7	12	7.1
	110	126	6.5	12	6.8
	111	126	6.5	10.3	6.8
	115	126	5.2	8	5.5
	118	126	5	7	5.3
	120	130	5	3	5.3
	124	139	6.5	10.3	6.8
	125	141	6.5	12	6.8
	135	147	7	12	7.1
	141	151	5	7	5.3
	143	151	5	7	5.3
	150	169	7	11	7.1
	160	180	6.5	12	6.8
	162	172	5	7	5.3
	163	175.2	7	10	7.1
	171	179	5	7	5.3

往復用防塵密封件

[illegible][illegible]

往復用防塵密封件

Type	Ø d	Ø D	t	h	H
DH-05"	3 1/2	4 1/8		5/16	0.198
	4 3/8	5		5/16	0.198
	5 1/4	5 7/8		5/16	0.198
	6 3/8	7		5/16	0.198