


往復用金屬骨架防塵密封件

ME-1 Type

材質：TPU / 8L95+SPCC

硬度：95 Shore A

工作溫度：-20°C ~ 100°C

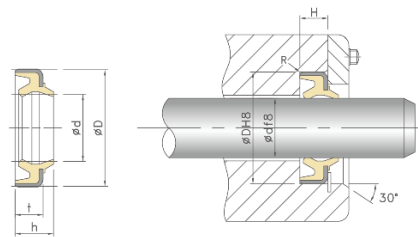

$R \leq 0.3$

活塞桿表面應作 0.8~1.6 μmRmax (0.2~0.4 μmRa) 的拋光。

Type	Ø d	Ø D	t	h	H
ME-1	10	20	5	7	5
	16	26	5	7	5
	18	30	6	9	6
	19	26	5	7	5
	20	32	6	9	6
	22	32	6	9	6
	22	34	6	9	6
	25	37	6	9	6
	30	42	6	9	6
	32	45	7	10	7
	32	52	8	11	8
	34	46	7	10	7
	35	47	7	10	7
	35	55	7	10	7
	40	50	7	10	7
	40	52	7	10	7
	40	60	7	10	7
	45	55	7	10	7
	45	57	7	10	7
	45	65	7	10	7
	50	60	7	10	7
	50	62	7	10	7
	50	65	7	10	7
	52	62	7	10	7
	55	65	7	10	7
	55	69	8	11	8
	55	75	7	10	7
	60	70	5	7	5

Type	Ø d	Ø D	t	h	H
ME-1	60	70	7	10	7
	60	74	8	11	8
	63	73	7	11	7
	65	79	8	11	8
	65	85	7	10	7
	70	80	7	10	7
	70	82	7	10	7
	70	84	8	11	8
	70	85	7	10	7
	75	89	8	11	8
	75	95	7	10	7
	80	90	7	10	7
	80	94	8	11	8
	85	95	7	10	7
	85	99	8	11	8
	90	104	8	11	8
	95	109	8	11	8
	100	114	8	11	8
	105	121	9	12	9
	110	126	9	12	9
	115	131	9	12	9
	120	136	9	12	9
	125	140	9	12	9
	125	141	9	12	9
	130	146	9	12	9
	140	160	10	14	10
	150	170	10	14	10
	160	180	10	14	10

往復用金屬骨架防塵密封件

[illegible][illegible]