


往復用金屬骨架防塵密封件

ME-3 Type

材質：TPU / 8L95+SPCC

硬度：95 Shore A

工作溫度：-20°C ~ 100°C

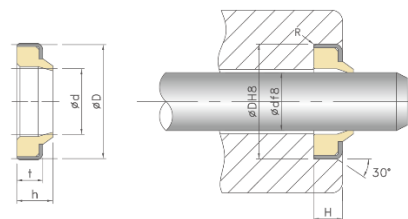

$R \leq 0.3$

活塞桿表面應作 0.8~1.6 μ mRmax (0.2~0.4 μ mRa) 的拋光。

Type	Ø d	Ø D	t	h	H
ME-3	6.3	16	5	7	5
	10	20	5	7	5
	11.2	21	5	7	5
	12	18	3.5	5	3.5
	12.5	23	5	7	5
	14	24	5	7	5
	15	25	5	7	5
	16	26	5	7	5
	18	28	5	7	5
	18	28	7	10	7
	18	30	6	9	6
	20	30	5	7	5
	20	32	6	9	6
	22.4	34.4	6	9	6
	25	35	5	7	5
	25	35	6	7	6
	25	37	6	9	6
	27	39	6	9	6
	28	40	6	9	6
	30	40	5	7	5
	30	42	6	9	6
	30	45	7	10	7
	31.5	44	7	10	7
	31.75	41.28	4.75	7.14	4.75
	32	44	7	10	7
	35	47	7	10	7
	35.5	47.5	7	10	7
	38	50	7	10	7

Type	Ø d	Ø D	t	h	H
ME-3	38.1	47.63	4.75	7.14	4.75
	40	52	7	10	7
	42	52	5	7	5
	45	57	7	10	7
	50	60	7	10	7
	50	62	7	10	7
	53	67	8	11	8
	55	69	8	11	8
	56	70	8	11	8
	57.15	66.67	4.75	7.14	4.75
	60	74	8	11	8
	63	75	7	10	7
	63	77	8	11	8
	64	78	8	11	8
	65	79	8	11	8
	67	81	8	11	8
	70	84	8	11	8
	71	85	8	11	8
	75	89	8	11	8
	76.2	85.72	4.75	7.14	4.75
	80	94	8	11	8
	85	99	8	11	8
	90	104	8	11	8
	95	109	8	11	8
	100	114	8	11	8
	105	121	9	12	9
	110	126	9	12	9
	115	131	9	12	9

往復用金屬骨架防塵密封件

[illegible][illegible]