


往復用金屬骨架防塵密封件

ME-4 Type

材質：TPU / 8L95+SPCC
硬度：95 Shore A
工作溫度：-20°C ~ 100°C

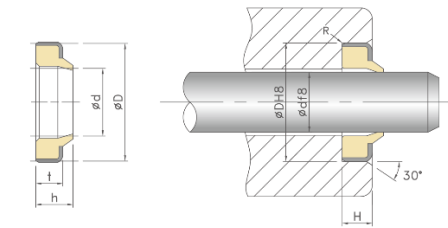

$R \leq 0.3$
活塞桿表面應作 0.8~1.6 μmRmax (0.2~0.4 μmRa) 的拋光。

Type	Ø d	Ø D	t	h	H
ME-4	10	16	3.5	5	3.5
	13	19	4	4.5	4
	16	22	3	4	3
	20	28	3.5	5	3.5
	20	30	7	10	7
	25	32	7	10	7
	25	35	7	10	7
	25.4	34.93	4.75	7.14	4.75
	31.75	41.28	4.75	7.14	4.75
	32	40	4	7	4
	32	45	7	10	7
	8	48	7	10	7
	38.1	47.63	4.75	7.14	4.75
	40	50	7	10	7
	45	55	7	10	7
	45	60	7	10	7
	50	60	7	10	7
	50.8	60.33	4.75	7.14	4.75
	55	65	5	7	5
	60	70	7	10	7
	63	75	7	10	7
	65	75	7	10	7
	70	80	7	10	7
	75	85	7	10	7
	80	90	7	10	7
	90	100	7	10	7
	100	110	7	10	7
	100	115	8	10	8

Type	Ø d	Ø D	t	h	H
ME-4	110	120	7	10	7
	120	130	7	10	7
	120	132	5.5	8	5.5
	125	140	9	12	9