


往復用金屬骨架防塵密封件

ME-5 Type

材質：TPU / 8L95+SPCC
硬度：95 Shore A
工作溫度：-20°C ~ 100°C

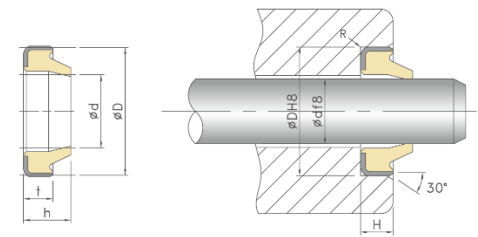

$R \leq 0.3$
活塞桿表面應作 0.8~1.6 μmRmax (0.2~0.4 μmRa) 的拋光。

Type	Ø d	Ø D	t	h	H
ME-5	8	14	3.5	5	3.5
	25.4	34.93	4.75	7.14	4.75
	31.75	41.28	4.75	7.14	4.75
	36	48	7	10	7
	38.1	47.63	4.75	7.14	4.75
	55	65	5	7	5
	55	69	8	13	8
	60	74	8	13	8
	65	75	5	7	5
	65	79	8	13	8
	70	84	8	13	8
	75	83	7	10	7
	75	89	8	13	8
	76.2	85.72	4.75	7.14	4.75
	80	94	8	13	8
	85	99	8	13	8
	90	104	8	13	8
	95	109	8	13	8
	100	114	8	13	8
	105	121	9	15	9
	110	126	9	15	9
	115	131	9	15	9
	120	136	9	15	9
	125	140	9	12	9
	130	146	9	15	9
	140	155	9	12	9
	280	310	16	22	16

Type	Ø d	Ø D	t	h	H