


往復用金屬骨架防塵密封件

ME-8 Type

材質：TPU / 8L95+SPCC

硬度：95 Shore A

工作溫度：-20°C ~ 100°C

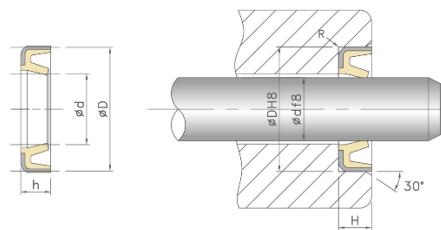

$R \leq 0.3$

活塞桿表面應作 0.8~1.6 μmRmax (0.2~0.4 μmRa) 的拋光。

Type	Ø d	Ø D	h	HA
ME-8	50	65	5	5
	50	72	8	8
	55	70	5	5
	60	75	5	5
	60	75	6	6
	60	75	8	8
	65	80	5	5
	65	80	6	6
	65	80	8	8
	70	80	4.5	4.5
	70	85	5	5
	70	85	6	6
	70	85	8	8
	70	90	5	5
	71	86	5	5
	75	85	5	5
	75	90	5	5
	75	90	8	8
	80	90	4.5	4.5
	80	95	4	4
	80	95	5	5
	80	95	6	6
	80	95	8	8
	85	95	5	5
	85	100	5	5
	85	100	6	6
	85	100	8	8
	90	105	5	5

Type	Ø d	Ø D	h	HA
ME-8	90	105	6	6
	90	105	8	8
	90	105	10	10
	90	106	6	6
	90	106	8	8
	90	110	5	5
	90	110	8	8
	95	110	6	6
	95	110	8	8
	100	110	4.5	4.5
	100	115	5	5
	100	115	6	6
	100	115	7	7
	100	115	8	8
	100	116	6	6
	100	116	8	8
	100	120	8	8
	100	125	6	6
	100	125	8	8
	105	120	5	5
	105	120	7	7
	110	125	5	5
	110	125	6	6
	110	125	7	7
	110	125	8	8
	110	130	8	8
	110	130	10	10
	110	135	8	8

往復用金屬骨架防塵密封件

[illegible][illegible]