


往復用防塵密封件

DH-04 Type

材質：TPU / 8L953
硬度：93 Shore A
工作溫度：-20°C ~ 100°C

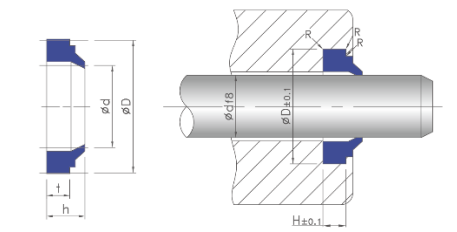

$R \leq 0.3$
活塞桿表面應作 0.8~1.6 μ mRmax (0.2~0.4 μ mRa)的拋光。

Type	Ø d	Ø D	t	h	H
DH-04	12	18	2.5	5	2.5
	14	20	2.5	5	2.5
	16	24	3.8	7	4
	18	26	3.8	7	4
	18	26	4	7	4
	20	28	4	7	4
	22	30	4	7	4
	25	33	4	7	4
	28	36	4	7	4
	30	38	4	7	4
	32	40	4	7	4
	35	43	4	7	4
	36	44	4	7	4
	38	46	4	7	4
	40	48	4	7	4
	42	50	4	7	4
	45	53	4	7	4
	50	58	4	7	4
	55	63	4	7	4
	60	68	4	7	4
	65	73	4	7	4
	70	78	4	7	4
	75	83	4	7	4
	80	88	4	7	4
	85	93	4	7	4
	90	98	4	7	4
	100	108	4	7	4
	105	113	4	7	4

Type	Ø d	Ø D	t	h	H
DH-04	160	172	5.5	10	5.5
	230	245	6.5	13	6.5